

DCB

Metallized polypropylene film capacitor MKP - DC Link Capacitor - small size Up to 4 x terminals execution



Main applications

DC capacitor for medium-low power DC-Link applications in inverters, AC / DC motor controls and welding equipments. **Not suitable for AC applications: refer to MHBA / MHBS series**

Dielectric

Polypropylene

Electrodes

Vacuum deposited metal layers

Coating

Solvent resistant plastic case with resin sealing (UL 94 V-0). Flame retardant execution

Construction

Extended metallized film (refer to general technical information)

Terminals

Tinned copper wire (lead free). 2 and 4 leads execution.

Degree of protection

IP00

Installation

Whatever position assuring correct heat dissipation. Arrangement of many components with box walls in contact not admitted; suggested minimum distance between side by side elements $\geq 1/8$ of the box thickness (B size)

Reference standard

IEC 61071, IEC 60068, RoHS compliant

Climatic category

40/85/21 (IEC 60068/1), GPE (DIN40040)

Operating temperature range (case)

$-40^{\circ}\dots+85^{\circ}\text{C}$ (at $+85^{\circ}\text{C}$ without power applied)

Max. permissible ambient temperature

$+70^{\circ}\text{C}$ (operation at rated power, current, voltage and natural cooling)

Rated capacitance (Cr)

7,5 μF to 55 μF . Refer to article table

Capacitance tolerance (at 1kHz)

$\pm 10\%$ (code=K), $\pm 5\%$ (code=J). Other tolerances upon request

Capacitance temperature coefficient

Refer to graphs in general technical information

Long term stability (at 1 kHz)

Capacitance variation $\leq \pm 1\%$ after a period of 2 years at standard environmental conditions

Rated voltage (Ur)

700, 900, 1100 Vdc

Non recurrent surge voltage (Upk)

875, 1125, 1375 Vdc

Max. repetitive peak voltage (Upkr)

1,15x Ur (30 minutes max./ day)

Self inductance

$\leq 1\text{nH/mm}$ of capacitor pitch

Maximum pulse rise time

Refer to article table

Maximum peak current (Ipeak)

Refer to article table

Dissipation factor (DF), max.

$Tg\delta \times 10^{-4}$, measured at $25\pm 5^{\circ}\text{C}$, 1kHz

Cr $\leq 20\mu\text{F}$	Cr $> 20\mu\text{F}$
20	30

Insulation resistance (IR)

$\geq 3000\text{s}$ when measured between terminals, at $25\pm 5^{\circ}\text{C}$, after 1 minute of electrification at 100Vdc

Test voltage between terminals (Ut)

1,5xUr (DC) applied for 10s at $25\pm 5^{\circ}\text{C}$

Test voltage between terminals and case (Utc)

3kV 50=60Hz applied for 60s at $25\pm 5^{\circ}\text{C}$

Damp heat test (steady state)

Test conditions:

Temperature= $+40\pm 2^{\circ}\text{C}$

Relative humidity= $93\pm 2\%$

Test duration= 21 days

Performance:

Capacitance change $\leq \pm 3\%$

DF change ≤ 0.0010 at 1kHz

IR $\geq 50\%$ of initial limit value

Typical capacitance change versus operating time

-5% after 100'000 hours at Ur

Life expectancy

$\geq 100'000$ hours (Ur)

Failure quota

300/10⁹ component hours

Resistance to soldering heat test

Test conditions:

Solder bath temperature= $+260\pm 5^{\circ}\text{C}$

Dipping time (with heat screen)= 10 \pm 1s

Performance:


Capacitance change $\leq \pm 1\%$

DF change ≤ 0.0010 at 1kHz

IR $\geq 50\%$ of initial limit value


Warning

This specification must be completed with the data given in the "General technical information" chapter



DCB

Metallized polypropylene film capacitor
MKP - DC Link Capacitor - small size
Up to 4 x terminals execution

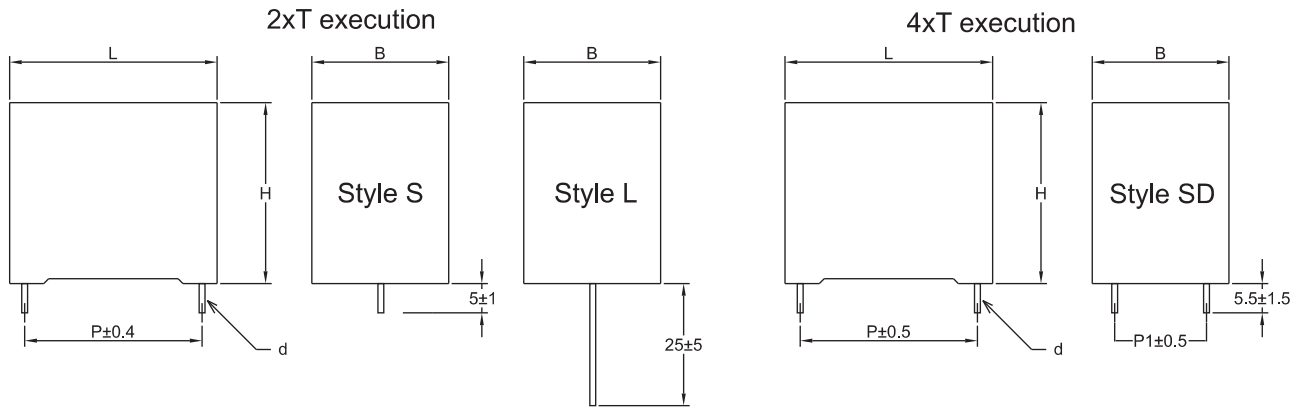

DCB article table (different values available upon request)

Ur	Upk	Upkr	Cap.	Dimension in mm							du/dt	Ipeak	Irms ⁽²⁾	ESR ⁽³⁾	ICEL Code ⁽¹⁾
Vdc	Vdc	Vdc	µF	B	H	L	d	P	P1	V/µs	A	A	mΩ		
700	875	805	12,5	22	30	42,5	1,2	37,5	-	13	162,5	7,5	10,5	DCB1705125*J#	
700	875	805	15	22	33,5	42,5	1,2	37,5	-	13	195	8	9,3	DCB1705150*J#	
700	875	805	15	22	33,5	42,5	1,2	37,5	10,2	13	195	9,5	8,4	DCB1705150*JSD	
700	875	805	20	28	37	42,5	1,2	37,5	-	13	260	10	7,8	DCB1705200*J#	
700	875	805	20	28	37	42,5	1,2	37,5	10,2	13	260	12	6,9	DCB1705200*JSD	
700	875	805	22	28	37	42,5	1,2	37,5	-	13	286	10	7,4	DCB1705220*J#	
700	875	805	22	28	37	42,5	1,2	37,5	10,2	13	286	12	6,5	DCB1705220*JSD	
700	875	805	30	30	45	42,5	1,2	37,5	-	13	390	12,5	6,0	DCB1705300*J#	
700	875	805	30	30	45	42,5	1,2	37,5	20,3	13	390	15	5,1	DCB1705300*JSD	
700	875	805	45	30	45	57,5	1,2	52,5	-	10	400	13,5	6,3	DCB1705450*R#	
700	875	805	45	30	45	57,5	1,2	52,5	20,3	10	400	16,5	5,4	DCB1705450*RSD	
700	875	805	55	35	50	57,5	1,2	52,5	-	10	500	14	5,5	DCB1705550*R#	
700	875	805	55	35	50	57,5	1,2	52,5	20,3	10	500	19	4,6	DCB1705550*RSD	
900	1125	1035	10	22	33,5	42,5	1,2	37,5	-	16	160	7,5	10,3	DCB1905100*J#	
900	1125	1035	12	20	40	41,5	1,2	37,5	-	16	192	8,5	9,3	DCB1905120*J#	
900	1125	1035	12	20	40	41,5	1,2	37,5	10,2	16	192	10	8,4	DCB1905120*JSD	
900	1125	1035	15	28	37	42,5	1,2	37,5	-	16	240	9,5	8,4	DCB1905150*J#	
900	1125	1035	15	28	37	42,5	1,2	37,5	10,2	16	240	11,5	7,5	DCB1905150*JSD	
900	1125	1035	16	24	44	41,5	1,2	37,5	-	16	256	10	8,0	DCB1905160*J#	
900	1125	1035	16	24	44	41,5	1,2	37,5	10,2	16	256	12	7,1	DCB1905160*JSD	
900	1125	1035	20	30	45	42,5	1,2	37,5	-	16	320	11,5	7,1	DCB1905200*J#	
900	1125	1035	20	30	45	42,5	1,2	37,5	20,3	16	320	14	6,2	DCB1905200*JSD	
900	1125	1035	30	30	45	57,5	1,2	52,5	-	11	330	12,5	6,9	DCB1905300*R#	
900	1125	1035	30	30	45	57,5	1,2	52,5	20,3	11	330	15,5	6,0	DCB1905300*RSD	
900	1125	1035	40	35	50	57,5	1,2	52,5	-	11	440	14	6,0	DCB1905400*R#	
900	1125	1035	40	35	50	57,5	1,2	52,5	20,3	11	440	19	5,1	DCB1905400*RSD	
1100	1375	1265	7,5	22	33,5	42,5	1,2	37,5	-	20	150	7	11,6	DCB2114750*J#	
1100	1375	1265	10	28	37	42,5	1,2	37,5	-	20	200	9	9,6	DCB2115100*J#	
1100	1375	1265	10	28	37	42,5	1,2	37,5	10,2	20	200	10,5	8,7	DCB2115100*JSD	
1100	1375	1265	12,5	30	45	42,5	1,2	37,5	-	20	250	10,5	8,3	DCB2115125*J#	
1100	1375	1265	12,5	30	45	42,5	1,2	37,5	20,3	20	250	12,5	7,4	DCB2115125*JSD	
1100	1375	1265	20	30	45	57,5	1,2	52,5	-	13	260	12	7,9	DCB2115200*R#	
1100	1375	1265	20	30	45	57,5	1,2	52,5	20,3	13	260	14	7,0	DCB2115200*RSD	
1100	1375	1265	25	35	50	57,5	1,2	52,5	-	13	325	14	7,1	DCB2115250*R#	
1100	1375	1265	25	35	50	57,5	1,2	52,5	20,3	13	325	16	6,2	DCB2115250*RSD	

⁽¹⁾Change the * symbol with the needed capacitance tolerance code: J=±5%, K=±10% and the # symbol with S for 5,5mm lead length and with L for 25 mm lead length - ⁽²⁾ Maximum values at 10kHz, +70°C, Cap. tol. ≤ ±10% - ⁽³⁾ Typical values at 10kHz

Warning: this specification must be completed with the data given in the "General technical information" chapter